



Short Angle Head Type



TXBMTWD-07 TXBMTWD-14


Drive	H	W	D
1/4" Hex.	26	3	12.5
1/4" Sq.	26	9	12.5
3/8" Sq.	26	12	12.5

(unit:mm)


TXBMTWD-30S3

Drive	H	W	D
3/8" Sq.	38	13.6	16

(unit:mm)

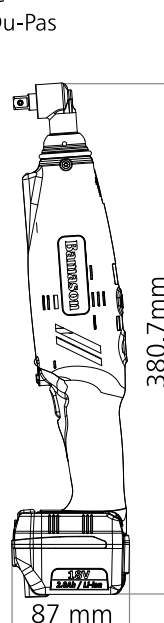

TXBMTWD-07
TXBMTWD-14

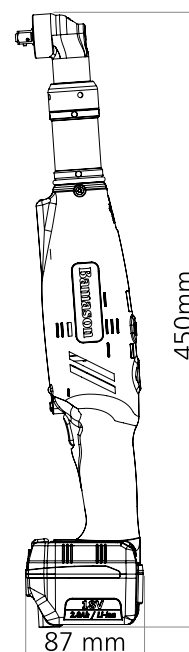

TXBMTWD-30S3

Specifications

Model	Drive Size	Volt	Screw Size	Torque Range (Nm)		Free Speed	Weight with battery		Vibration Value	Noise Level
	inch	V	mm	Hard joint	Soft joint	rpm	kg	lb	m/s2	dB(A)
TXBMTWD-07H2	1/4" Hex.	18	M3 - M5	1.8 - 8	1.8 - 7	400 - 800	1.5	3.2	<2.5	<75
TXBMTWD-07S2	1/4" Sq.									
TXBMTWD-07S3	3/8" Sq.									
TXBMTWD-14H2	1/4" Hex.	18	M4 - M6	3.5 - 16	3.5 - 14	200 - 500	1.5	3.2	<2.5	<75
TX BMTWD-14S2	1/4" Sq.									
TX BMTWD-14S3	3/8" Sq.									
TX BMTWD-30S3	3/8" Sq.	18	M5 - M8	8 - 32	8 - 30	200	1.9	4.2	<2.5	<75