


HYDRAULIC BOLT TENSIONING

Hydraulic Nut Splitters

Quick and easy removal of seized and corroded nuts with our compact hydraulic powered unit.

- Bolt sizes from 3/4" to 3-1/2"
- Fits BS1560 / ANSI B16.5 flanges
- Low maintenance
- Disposable triple edge blade
- Adjustable cutting depth
- Subsea versions available

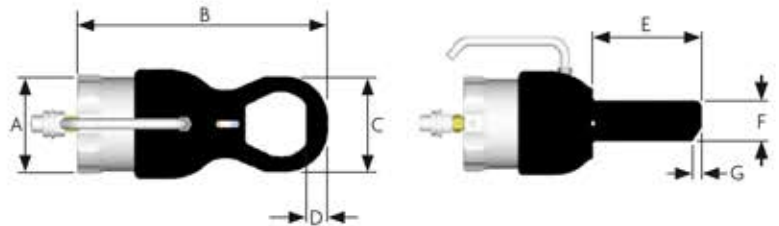

Tool Ref	Bolt Diameter		A mm	B mm	C mm	D mm	E mm	F mm	G mm	Approx Weight kg
	Imperial	Metric								
ENS1-1	3/4"	M20	104.0	228.0	76.0	18.0	104.0	40.5	9.0	6.7
	7/8"	M22								
	1"	M24								
		M27								
ENS1-2	3/4"	M20	104.0	239.0	90.0	21.0	110.0	40.5	10.0	6.9
	7/8"	M22								
	1"	M24								
	1-1/8"	M27								
	1-1/4"	M30								
ENS2-1	1-1/8"	M30	138.0	305.0	102.0	22.0	132.0	57.5	6.0	15.8
	1-1/4"	M33								
	1-3/8"	M36								
	1-1/2"	M39								
ENS2-2	1-1/8"	M30	138.0	34.0	114.0	23.0	141.0	57.5	6.0	16.0
	1-1/4"	M33								
	1-3/8"	M36								
	1-1/2"	M39								
	1-5/8"	M42								
ENS3-1	1-3/4"	M45	190.0	406.0	132.0	28.0	189.0	80.5	8.0	42.0
	1-7/8"	M48								
	2"	M52								
		M56								
ENS3-2	1-3/4"	M45	190.0	416.0	145.0	30.0	199.0	80.5	8.0	42.5
	1-7/8"	M48								
	2"	M52								
	2-1/4"	M56								
		M60								
ENS3-3	1-3/4"	M45	190.0	426.0	160.0	31.5	200.0	80.5	7.0	43.0
	1-7/8"	M48								
	2"	M52								
	2-1/4"	M56								
	2-1/2"	M60								
ENS3-4	1-3/4"	M45	190.0	437.0	174.0	35.0	204.0	80.5	9.0	44.0
	1-7/8"	M48								
	2"	M52								
	2-1/4"	M56								
	2-1/2"	M60								
	2-3/4"	M64								
		M68								
	M72									
ENS4-1	2-3/4"	M76	235.0	474.0	189.0	36.5	235.0	110.5	4.0	73.0
	3"	M80								
ENS4-2	2-3/4"	M76	235.0	495.0	279.0	41.0	240.0	110.5	3.0	75.0
	3"	M80								
	3-1/4"	M85								
	3-1/2"	M90								



BOLTIGHT®

HYDRAULIC BOLT TENSIONING

BOLTIGHT is the UK
Registered Trade Mark
of Boltight Limited

FMA 001 B