





AVVITATORE ANGOLARE A STRAPPO PER SISTEMA HRC

SECONDO NORMATIVA UNI-EN-14399-10



AVVITATORE A STRAPPO ANGOLARE POTENTE E COMPATTO

Confronto con modelli standard

	GM-221ZA GM-222ZA	GH-241ZA GH-242ZA	GV-301ZA GV-302ZA
L (mm)	241	304	312
	↓	↓	↓
	GMC-221EZ GMC-222EZ	GHC-241EZ GHC-242EZ	GVC-301EZ GVC-302EZ
L (mm)	154	171	202





La forma compatta del Gearbox ne consente l'utilizzo in spazi ristretti


Nuovo sistema di raffreddamento

Alte prestazioni con il nuovo corpo motore in alluminio



Meccanismo anti-strappo

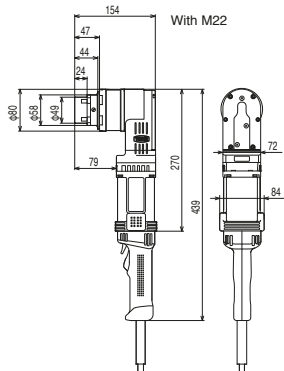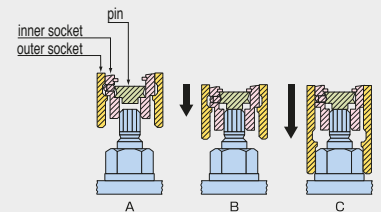

GMC-221EZ
GMC-222EZ

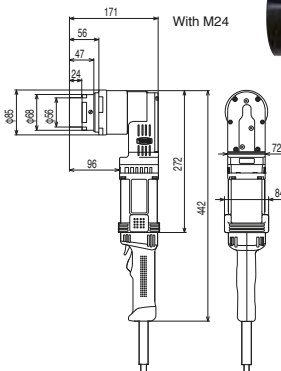

GHC-241EZ
GHC-242EZ

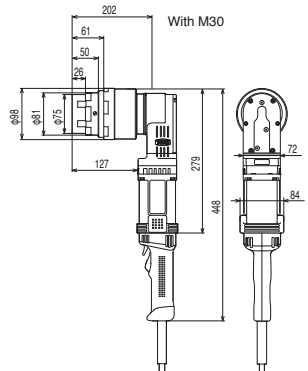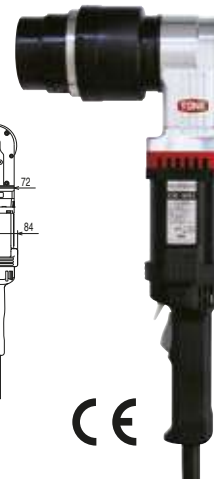

GVC-301EZ
GVC-302EZ

Modello	GMC-221EZ	GMC-222EZ	GHC-241EZ	GHC-242EZ	GVC-301EZ	GVC-302EZ
Frequenza	50-60Hz		50-60Hz		50-60Hz	
Volt	110-120V	220-230V	110-120V	220-230V	110-120V	220-230V
Corrente	14 A	7.5A	14.5A	7.5A	14A	7A
Potenza	1550W		1650W		1550W	
Coppia massima	800N·m		1250N·m		2150N·m	
Velocità libera	17min ⁻¹ (rpm)		11min ⁻¹ (rpm)		6min ⁻¹ (rpm)	
Capacità vite	S10T	M16,M20,M22	M16,M20,M22,M24		M24,M27,M30	
	A325	5/8" 3/4" 7/8"	3/4" 7/8" 1"		1" 1-1/8"	
	A490	5/8" 3/4" 7/8"	3/4" 7/8" 1"		1" 1-1/8"	
Peso	5.3kg		6.0kg		7.4kg	
Classe di protezione	□ (class II tool)		□ (class II tool)		□ (class II tool)	

Manufactured by

TONE TONE CO., LTD.
OSAKA, JAPAN.

Specifications and the design are subject to change without notice.
TONE is certified to ISO9001:2008 and ISO14001:2004.



Your Distributor

UVIT srl
Via F. Busoni 7/A
20137 Milano (MI) ITALY
T +39 02 5516084
F +39 02 54100 448
staffuvit@uvit.it - www.uvit.it



[FLKA006] 14.09.05.TK